
# ZX10 FULLY RUGGED TABLET




- Processeur 8 cœurs Qualcomm® QCS6490
- Écran tactile capacitif LumiBond de 10.1" compatible avec la technologie de lecture en plein soleil Getac (1 000 nits) et utilisable avec des gants.
- Deux batteries remplaçables à chaud pour un fonctionnement ininterrompu
- Certification MIL-STD-810H et IP66, avec résistance aux chutes de 1,8 m (6 pi)
- Lecteur de code-barres (en option)
- Plusieurs configurations avec des outils de gestion de niveau entreprise dans un facteur de forme léger
- Vérifié comme Android enterprise recommended [i]

ZX10 3D demo

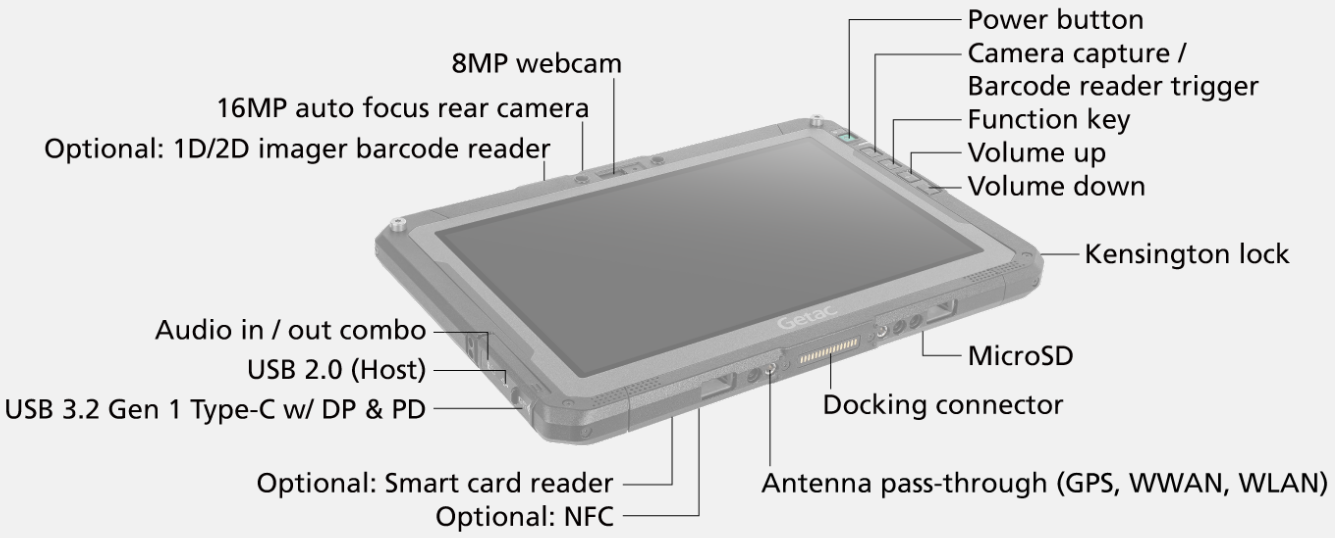

# ZX10 FULLY RUGGED TABLET

## SPECIFICATIONS

### Generation
G2

### Operating System
Android™ 15.0 [i]

### Mobile Computing Platform
Qualcomm® QCS6490, Octa-core 1.9GHz
Max. 2.7GHz

### Graphics
Qualcomm® Adreno™ 643 GPU

### NPU
Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

### Display
10.1" TFT LCD WUXGA (1920 x 1200)
Protection film
1000 nits LumiBond display with Getac sunlight readable technology
Capacitive multi-touch screen

### Storage & Memory
8GB LPDDR5

256GB UFS

### Device Button
Power button
4 tablet programmable buttons

### Pointing Device
Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

### Audio
Integrated stereo speakers
Integrated dual-array microphone

### Expansion Slot
Optional: 1D/2D imager barcode reader
Optional: Smart card reader
Optional: NFC [ii]

### I/O Interface
8MP webcam x 1
16MP auto focus rear camera x 1
Audio in/out combo x 1
USB 2.0 (Host) x 1
USB 3.2 Gen 1 Type-C (with DisplayPort & Power Delivery) x 1
MicroSD x 1
Docking connector x 1
Optional: SIM card slot x 1 (Nano-SIM, 4FF) [x]
Optional: RF antenna pass-through for GPS, WWAN and WLAN

### Communication Interface
Wi-Fi 6E 802.11ax
Bluetooth (v5.2) [iii]
Optional: Dedicated L1/L5 GPS [v]
Optional: 4G LTE mobile broadband [iv]
Optional: 5G Sub-6 [iv]
Optional: Dual SIM (Nano-SIM 4FF and e-SIM) [iv, x]

### Security Feature
Kensington lock
Optional: NFC [ii]
Optional: Smart card reader

### Power
Li-ion battery (3.88V, typical 4990mAh; min. 4870mAh) + Battery bay cover
LifeSupport battery swappable technology

**Swappable Battery Options:**
1. Battery (3.88V, typical 4990mAh; min. 4870mAh) x 2
2. High capacity battery (3.88V, typical 9980mAh; min. 9740mAh) x 2

### Dimension (W x D x H) & Weight
275 x 192 x 17.9mm (10.8 " x 7.56" x 0.7")
906g (1.99lbs) [vi]

### Rugged Feature
MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant [ix]
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)

### Environmental Specification
Temperature [vii]:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

### Pre-installed Software
Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, YouTube music, Google TV, Meet and photos)
Getac Log Tool
Getac Diagnostic
Getac Monitoring (trial version) agent/SDK
Getac Management (trial version) agent/SDK

### Optional software
Getac Driving Safety Utility
Getac Monitoring
Getac Management
Getac OEMConfig

### Accessories
Battery (3.88V, typical 4990mAh; min. 4870mAh)

**Optional:**
Carry bag
Battery (3.88V, typical 4990mAh; min. 4870mAh)
High capacity battery (3.88V, typical 9980mAh; min. 9740mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
65W USB-C AC adapter
DC-DC vehicle adapter (65W, 11-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Rotating hand strap with kickstand
Keyboard dock
Vehicle dock [viii]
Office dock

### Bumper-to-Bumper warranty
Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

**Standard**
Garantie Bumper-to-Bumper de 3 ans

| | Vehicle Dock | Office Dock (Pogo) |
|---|---|---|
| Microphone | 1 | 1 |
| Audio Output | 1 | 1 |
| DC in Jack | 1 | 1 |
| USB | USB 2.0 x 2 | USB 2.0 x 3 |
| LAN | - | 1 |
| HDMI | - | 1 |
| RF Pass-through | Optional: RF antenna connector x 3 (GPS, WWAN, WLAN) | - |
| Kensington Lock | - | Kensington Lock x 1 |

I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.

II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).

III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.

IV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.

V. Support GPS, GLONASS, Galileo and BeiDou.

VI. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 140g.

VII. When using AC power, the device operates in temperatures as low as -29°C (-20°F), as tested by an independent third-party laboratory following MIL-STD-810H standards. For battery-only operation, it functions down to -15°C (5°F) with one standard battery, -21°C (-6°F) with two standard batteries, and -29°C (-20°F) with two high-capacity batteries.

VIII. Gamber Johnson and Havis vehicle docks are e-mark certified.

IX. Drop test results vary from configurations and optional accessories.

X. Units with 4G/5G option come with an embedded SIM card slot.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

GETAC TECHNOLOGY CORPORATION
12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/
Copyright © 2026 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.